
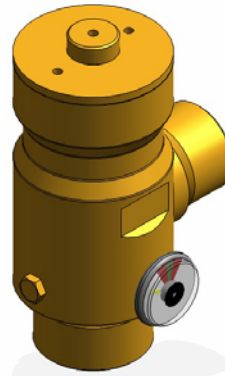


## PRESSURE GAUGE

### Description

Assembled in the factory directly on the side port of the container valve, it indicates at all times the pressure (in bar and psi) in the cylinder charged with extinguishing agent. The connection of the pressure gauge for FM-200® to the container valves have a non-return mechanism which allows the pressure gauge to be changed or removed with the cylinder pressurised.



### Technical information

PRESSURE GAUGE	
Part number	Working pressure
UF40H-P25	25 Bar
UF40H-P32	32 Bar
UF40H-P34	34 Bar
UF40H-P42	42 Bar
UF40H-P50	50 Bar
UF40H-P55	55 Bar
UF40I-P200	100-120-150-200 Bar
Approvals	<b>UL-EX15547</b> <b>FM-3053302</b>

WARNING: This type of pressure gauge, are manufactured and approved to be used in fixed extinguishing installations with FM-200®. This product is not designed for other use or purpose. If product user has any doubt regarding the application or product use, please contact +34 947 28 11 08. Every not approved use or application or / and any other not approved modification of the product or its function may cause serious accidents or / and personal damages. SIEX 2001 S.L. is not responsible for any non-approved use of the application.

IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.

FM-200® is a registered Trademark of DuPont used under license by SIEX 2001 S. L